

Fixtures for hygiene protection






When Social Distancing (6 feet apart) is not enough to safely complete the transaction: You need to keep your employees safe. You need to give your customers that piece of mind that they are protected from infection. You need to reduce your liability, and drastically reduce the risk of spreading infection. Your solution? Beyerle's Hygiene Protection System. We offer Mounting Clamps, Stand Offs, and Hangars for customizable Glass or Acrylic Virus Shields for use in Banks, Retail Stores, Medical Offices, Reception areas... Or, any other application.

To get started see below for capabilities and ordering.

- ✓ short delivery times (for stock items)
- ✓ discount prices
- ✓ customized production on our modern machinery

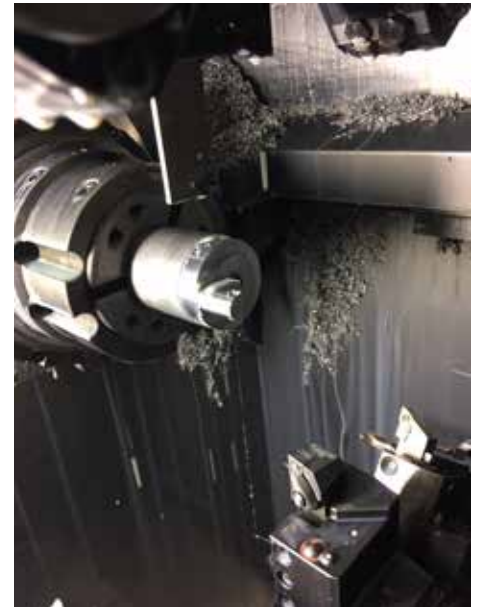



Standoff for:

glass thickness: 6 - 10 mm
 length: 15 - 100 mm
 diameter: 15 - 38 mm
 material: stainless steel AISI 304

Standoff range excerpt:

Standoff with flat top

Art. No.	L
S151-15	15
S151-20	20

black washers for glass protection,
 drill hole \varnothing 8 mm + 0,3 mm



Decorative caps and decorative screws for:

glass thickness: 4 - 12 mm
 diameter: 10 - 55 mm
 optional glass protection set
 material: stainless steel AISI 304

Decorative caps range excerpt:

Art. No.	\varnothing	M	T	H	D
S106-22	22	M6	4,5	4	\varnothing 8
S106-30	30	M8	7	4	\varnothing 10

with tightening screw in hole, please note the
 dimension of the drilling for glass



Round mirror clamps for:

glass thickness: 4 - 8 mm
 diameter: 15 and 22 mm
 optional glass protection set
 material: stainless steel AISI 304

Round sign holders for:

glass thickness: 4 - 8 mm
 diameter: 15 and 22 mm
 material: stainless steel AISI 304

Art. No.	\varnothing	T	L
S50	22	10 x 17	40

fixture with plastic screw



Wire system Arakawa:

Extensive range of wire holders for glass and
 acrylic panels including ceiling suspensions

Wire gripper range excerpt:

Plate holder for vertical plates
 panel thickness up to 10 mm
 material: stainless steel 1.4305
 cable thickness: \varnothing 1,5 mm
 drill hole for display \varnothing 5 mm

Art. No.

BS31





Flatec glass connector:

glass thickness: 4 - 10 mm
width 25 and 40 mm
material: stainless steel AISI 304

Flatec glass connector range excerpt:

180° - glass-glass connector
90° - glass-glass connector
90° - T-connector
90° - glass-wall connector



Duetec glass connector:

glass thickness: 6 - 12 and 16/28 mm
diameter: 22/30/38 mm
material: stainless steel AISI 304

Duetec glass connector range excerpt:

180° - glass-glass connector
90° - glass-glass connector
90° - T-connector
90° - glass-wall connector



Glass holder for counter top:

glass thickness: 6 - 12 and 16/28 mm
material: stainless steel AISI 304

Glass holder range excerpt:

Art. No.	glass thickness
GV40-8	8 - 13 mm
GV40-14	13 - 15 mm
GV40-14	24 - 26 mm

For glass thickness 4 - 6 mm (S51) or 6 - 8 mm



Glass holder for counter top:

glass thickness: 6 - 10 mm
diameter: 20 and 30 mm
straight or round connection
material: stainless steel V4A

Glass clamps range excerpt:

Art. No.	glass thickness	glass type
GK20-6EH	6 mm	ESG
GK22-8EH	8 mm	ESG
GK20-6,76EH	6,76 mm	VSG
GK22-8,76EH	8,76 mm	VSG

with rubber inserts, satin stainless steel

