

Track rail length	Set / Each								
0	2	3	4	5	6	7			
118 1/8"	2	4	4	8	1	2			
144"	2	4	4	8	1	2			
192"	2	4	4	10	1	2			

Beyerle US L.L.C., ABP-Beyerle, it's subsidiaries and agents are not responsible or liable for damage or injury to any persons or property due to improper installation of it's products. All liabilities reside solely with the installer.

Comply with all general safety regulations when installing the sliding door fittings!

Installation to be completed by qualified licensed contractor.

Be sure to tighten all screw connections one week after starting to use the sliding door fittings!

Neveruse scouring agents to clean the sliding door fittings; rather use commercially available stainlesssteel cleaners!

ABP beyerle

Beyerle US L.L.C. 5126 South Royal Atlanta Drive, Tucker, GA 30084, USA Phone (770) 349 - 6324, Fax (770) 934 - 3384, mail: info@beyerle-us.com, www.beyerle-us.com



Screw on



Screw on



Loosen/Tighten



Install

90°

At right angle







Adjust Set





Perpendicular



Measure Mark



Visual inspection



Special-tool



2 people required



Measure



Clarify questions




See Instructions



Secure

Installation instructions Sliding door fittings Flatec IV

for 2 leaf wood doors (max. 1 - 3/4" inch)

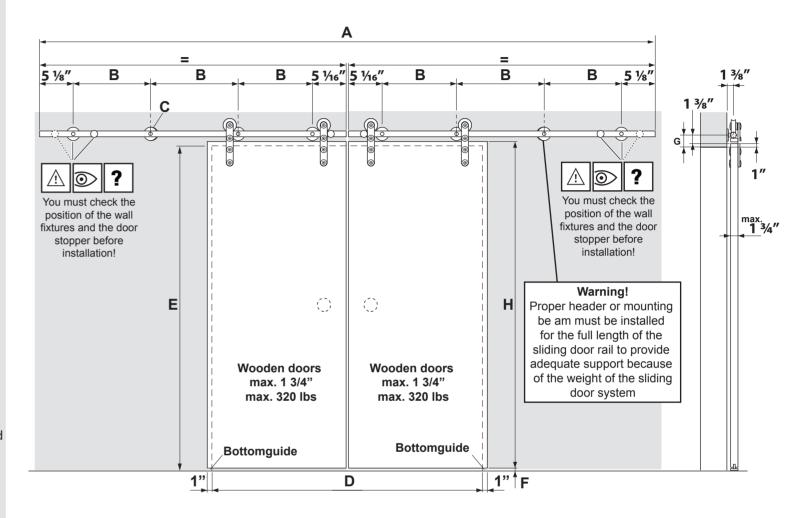

Complete-set's

A Inch	B Inch	C Each	D Inch	E max. Inch	F Inch	G Inch	H max. Inch (H=E-F+1")
118 1/8"	16 1/4"	8	55 1/8" - 59"	98 7/16"	1/4"- 3/8"	2 3/8"	99 1/8"
144"	20 %16"	8	59" - 70 %"	98 7/16"	1/4"- 3/8"	2 3/8"	99 1/8"
192″	21 7/16"	10	78 ¾" - 94 ½"	98 7/16"	1/4"- 3/8"	2 3/8"	99 1/8"

