


## Set - Urban Slide III

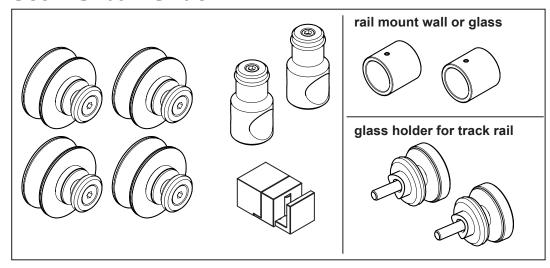



Reduce top track length opposite side from pre-drilled holes.

## **Optional**

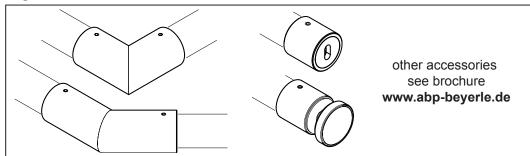

Comply with all general safety regulations when installing the sliding door fittings! Installation to be completed by qualified licensed contractor.

Be sure to tighten all screw connections one week after starting to use the sliding door fittings!

**Never** use scouring agents to clean the sliding door fittings; rather use commercially available stainless steel cleaners!



Beyerle US L.L.C.
5126 S Royal Atlanta Dr. , Tucker, GA 30084
Phone (770) 349 - 6324 , Fax (770) 934 - 3384 , mail: info@beyerle-us.com, www.beyerle-us.com

## Installation instructions Urban Slide III

Shower- sliding door fittings for glass doors ( 1/4" - 1/2" thickness)

