

Set Project	Set /Each						
1 Art. No.	2	3	4	5	6	7	
USU97-1800EF	1	2	2	4	1	1	
USU97-2100EF	1	2	2	4	1	1	
USU97-2300EF	1	2	2	5	1	1	
USU97-2540EF	1	2	2	5	1	1	

Beyerle US L.L.C., ABP-Byerle it's subsidiaries and agents are not responsible or liable for damage or injury to any persons or property due to improper installation of it's products.

All liabilities reside solely with the installer.



Comply with all general safety regulations when installing the sliding door fittings!

Installation to be completed by qualified licensed contractor.

Be sure to tighten all screw connections one week after starting to use the sliding door fittings!

Never use scouring agents to clean the sliding door fittings; rather use commercially available stainlesssteel cleaners!



Screw o

Screw on

Screw on

Coosen/Tighten

V Install

90° At right angle

€SS Dri

___ Dowels

Adjust Set

Leve

Perpendicular

Measure Mark

Visual inspection

Special-tool

2 people required

Measure

? Clarify questions

See Instructions


Secure

ABP ≜ beyerle

Beyerle US L.L.C. 5126 South Royal Atlanta Drive, Tucker, GA 30084 Phone (770) 349-6324, Fax (770) 934-3384, www.beyerle-us.com

Installation instructionsSliding door fittings **Project**

for glass doors (5/16" - 1/2" thickness)

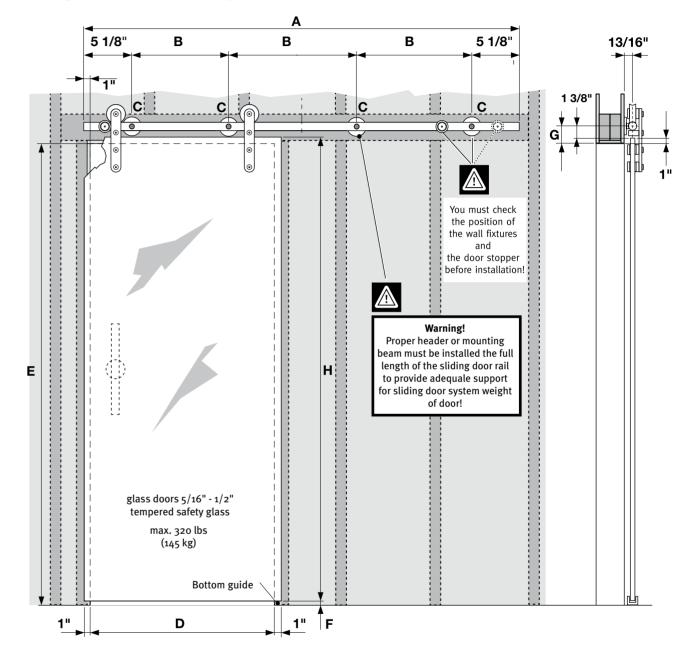

Complete-sets

Set Plano Artikel-No.	A inch	B inch	C Each	D inch	E max. inch	F inch	G inch	H max. inch (H=E-F+1")
USU97-1800EF	70 7/8"	20 1/4"	4	29 1/2" – 35 7/16"	98 7/16"	1/4"-3/8"	2 3/8"	99 1/8"
USU97-2100EF	82 11/16"	24 1/8"	4	35 13/16" – 39 3/8"	98 7/16"	1/4"-3/8"	2 3/8"	99 1/8"
USU97-2300EF	90 9/16"	20 1/16"	5	39 3/4" - 44 1/16"	98 7/16"	1/4"-3/8"	2 3/8"	99 1/8"
USU97-2540EF	100"	22 7/16"	5	44 1/2" - 49 3/16"	98 7/16"	1/4"-3/8"	2 3/8"	99 1/8"

